

# versol



## Product description

Ready-to-use primer made up of bitumen and high-volatility solvents.

## Uses

- Bonding primer for waterproofing with bitumen membranes.



## Features / Benefits

- Excellent bonding strength.
- Quick drying.
- Easy to apply.
- Black color.

## Precautions

- Apply to completely dry substrates.
- Do not use the blowtorch before VERSOL has thoroughly dried.
- Use only in well-ventilated areas.



## Surface preparation

- Clean surface thoroughly and remove dust, loose material or non-adhering particles, grease, oil and anything that may affect proper bonding.

## Application instructions

- Apply at a rate of approx. 250 gr/sqm (the actual coverage is dependent on substrate porosity and absorption).
- Tools may be cleaned with ICODIL SX.

## Application methods

- Brush, roller, airless spray.



PRODUCT FEATURE	MEASURE	UNIT
Type of product	one component	
Density	0.94 (± 0.05)	kg/lt
Solid content	59 (± 2%)	%
Full drying (at +23°C, 50% R.H.)	60	mins
Tack-free (at +23°C, 50% R.H.)	30	mins
Number of coats	1	No.
Spread rate per coat (according to substrate)	≈ 250	gr/sqm
Coverage (according to substrate)	4	sqm/kg
Dilution	ready to use	
Color	black	
Shelf Life	18	months

### Safety measures

- See SDS

### Storage

- Store in cool, dry, well-ventilated areas away from heat sources. Keep container tightly sealed.

### Packaging

- 5 – 10 – 20 – 25-kg metal cans.

### Color




Please e-mail us at: [assistentatecnica@icobititalia.com](mailto:assistentatecnica@icobititalia.com)  
 Our technical service will address your requests.  
 Ensure that the TDS is up to date: the latest version can be viewed and downloaded at [icobit.com](http://icobit.com)

The manufacturer reserves the right to amend the product specifications without notice. The above performances were measured according to the standards in force at the time of issue and represent the average results of our tests. Although highly reliable, they do not constitute a binding commitment nor liability for Icobit Italia S.r.l. The purchaser and the end consumer acknowledge responsibility for the product suitability to the intended use.



**ICOBIT ITALIA SRL**  
 Viale Luca Gaurico 9/11 00143 Roma (Italy)  
 C.F e P.I. 12428711001  
[www.icobit.com](http://www.icobit.com) | [info@icobititalia.com](mailto:info@icobititalia.com)

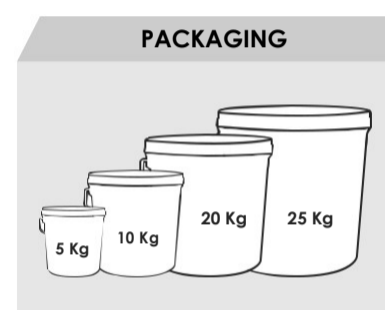

### TOOLS



BRUSH



ROLLER



AIRLESS SPRAY